

GW 320B PUR

PERFECT BINDER




Effective, high quality binding on coated or non coated stocks!



EVA



PUR

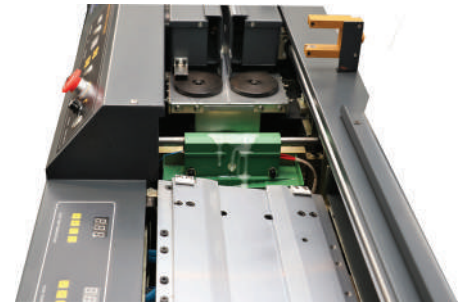

In-line notching, glue application, and nipping station



Sealed glue pot to reduce waste

KEY FEATURES:

- Automatic clamping, glue application, milling, and nipping
- Self-adjusting PUR side glue
- Sealed tank system to reduce waste
- Adjustable and automatic nip table pressure for a squarer spine
- Adjustable nip table side pressure
- Excellent for tacking tough adhesive binding jobs
- Built-in dust extraction
- High quality immediate (green) tack
- Rapid achievement of final bond strength
- Unparalleled adhesion to many surfaces
- Long lasting shelf life
- Increased spine flexibility
- Lay flat friendliness

Electrical	220-240V, Single Phase, 20A
Floor model	Yes
Cycle Speed	320 cycles/hour
Max binding length	12.6" (32cm)
Max thickness	1.75" (4.5cm)
Notching	2 blades
Dust extraction	Vacuum, enclosed
Automation	Fully automated binding
Cover Insertion	Manual

GRAPHIC WHIZARD AUTHORIZED DEALER:

